


Inlay72165-2 UHF RFID Inlay

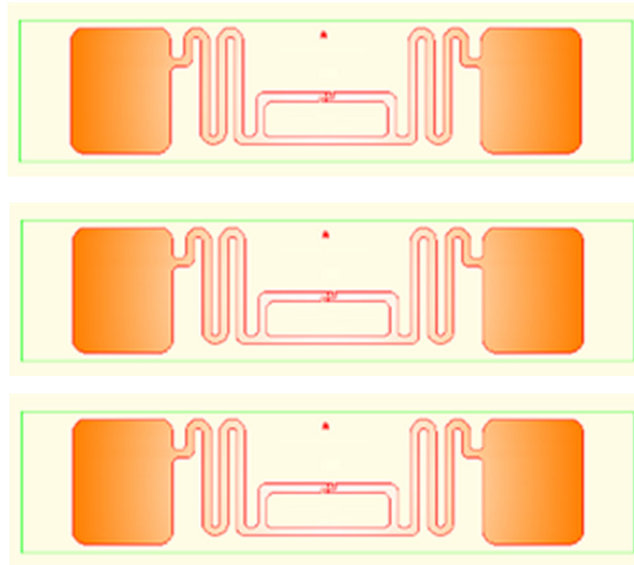

Features

- EPC global certified and ISO 18000-6C compliant.
- High receptivity range and excellent tag performance.
- Global frequencies 860 MHz ~ 960 MHz.
- Reliable and cost-effective UHF RFID solution.
- Suitable for corrugated material and plastic.
- High reading performance

Inlay72165-2 UHF RFID Inlay

Specifications

Dry Inlay Specification	
Wet Inlay Size	60 x 14.5mm
Antenna Material	Cu / PI
Web Pitch	19.5mm
Web Width	75mm
Core Width	75mm
Core ID	76mm / 3 inch
Core Material	Fiberboard
Max Roll OD	300mm

Wet Inlay Specification	
Wet Inlay Size	72 x 16.5mm
Antenna Material	Cu / PI
Web Width	75mm
Web Pitch	19.5mm
Core Width	75mm
Core ID	76mm / 3 inch
Core Material	Fiberboard
Max Roll OD	300mm
Inlay Adhesive	Acrylic adhesive
Adhesive Service temp.	-20°C ~ +150°C

Electrical Specification	
ISO 18000-6C	
EPC Class1 Gen 2	
EPC Memory	96 bits
Operating Freq.	860 ~ 960 MHz
Mode of Operation	Passive
IC	Impinj Monza 3

Environment	
Shelf Life	2 years
Storage Temp.	-20°C ~ +120°C 20% ~ 90%
Write Cycle	100,000

Delivery Formats	
Product Formats	Dry, wet inlay
Ship Form - PI	Roll, Sheet

Inlay72165-2 UHF RFID Inlay

Reliability Data

Item	Stress Condition	Test Samples	Criteria (Acc / Rej)	NF / FF ¹ test pass	NF / FF test NG	Result
Thermal Cycle Test (TCT)	-40°C / 15min ~ +85°C / 15min; Recover time <= 5 min; 100 cycles	45	0 / 1	45	0	Pass
High Temp Storage Test (HTST)	85°C, 500 hrs	45	0 / 1	45	0	Pass
Bending Test ²	At 20mm dia. Radius; die up/down weight 400g	9	0 / 1	9	0	Pass

Remarks:

- NF: Near Field
FF: Far Field
- Mandrel Bend Test:

