


Inlay-OD16 UHF RFID Inlay

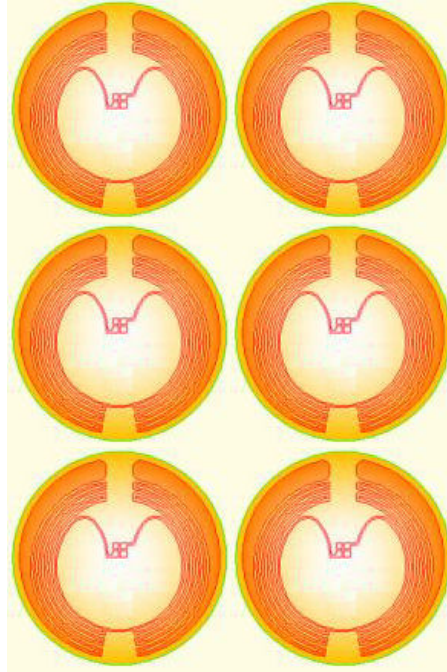

Features

- EPC global certified and ISO 18000-6C compliant.
- High receptivity range and excellent tag performance.
- Global frequencies 860 MHz ~ 960 MHz.
- Reliable and cost-effective UHF RFID solution.
- Smallest inlay & tag community

Inlay-OD16 UHF RFID Inlay

Specifications

Product Specification	
Size	Diameter 16 x 0.4mm
Material	FR4
Color	Yellow

Storage Environment	
-20°C ~ +150°C, 10% ~ 95%	

Operating Environment	
-20°C ~ +85°C, 10% ~ 95% RH	
Write cycles	100,000

Environment	
Heat Resistance	200°C (Up to 8 hrs)
Water proof	
Chemical Resistant	

Electrical Specification	
ISO 18000-6C	
EPC Class1 Gen 2	
EPC Memory	96 bits
User Memory	None
Operating Freq.	860 ~ 960 MHz
Mode of Operation	Passive
IC	Impinj M3

Delivery Formats	
Package size	1000 pcs / box

Options	